
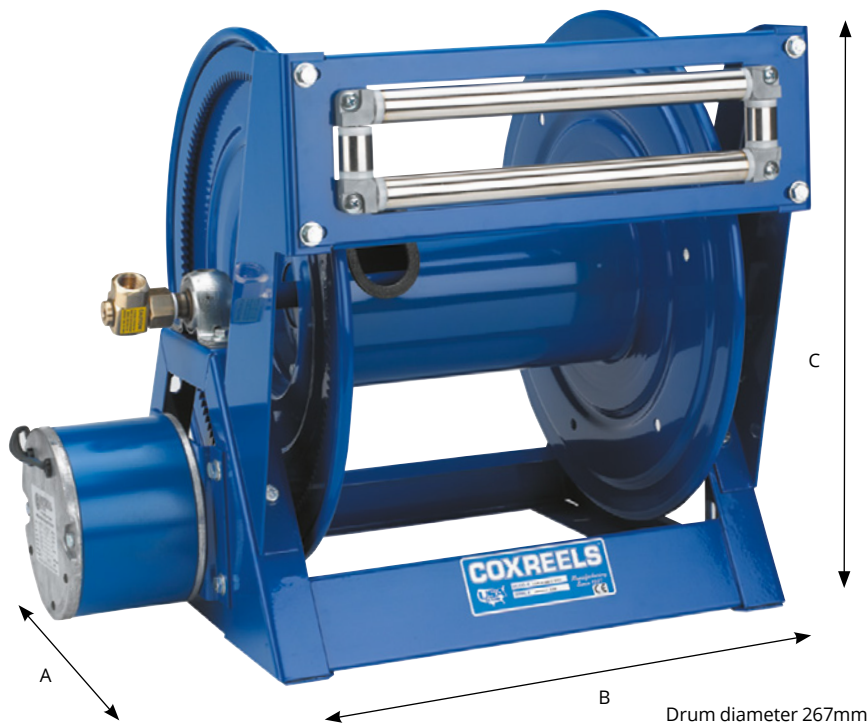


Series 1175 hand crank reels are designed for industrial applications where longer lengths of hose are required. Constructed in heavy gauge powder coated steel, all models are assembled and ready for wall, floor or overhead installation. The direct crank action combined with twin bearings requires minimum rewind effort, while the spring-loaded locking pin prevents drum rotation when not in use. Series 1175 power rewind reels combine the necessity of long hose lengths with the convenience of automatic rewind.

FEATURES:

- Discs: Heavy gauge steel with rolled edges to add strength and eliminate hose damage
- One piece, all welded steel 'A' frame construction
- Lock pin: Standard on hand crank models, available at extra cost on power rewind
- Motor rewind options: Electric (12, 24, 115v and 230v), compressed air and hydraulic
- Bearing: Self aligning pillow block bearings support the drum assembly
- Rewind mechanism: Chain and sprocket drive on all power rewind reels
- Swivel joint: Permits reel to rotate smoothly while connected to the fluid source.
- Swivel joint inlets are all zinc plated. Stainless steel and other alloys can be supplied to meet special requirements
- Drum assembly: All steel construction
- Axle/riser assembly: Provides full flow through the internal plumbing
- Rewind hand crank: Solid steel with a roller hand grip
- Tension brake: Standard on hand crank models
- Supplied as bare reel, hose available at extra cost (Application required).

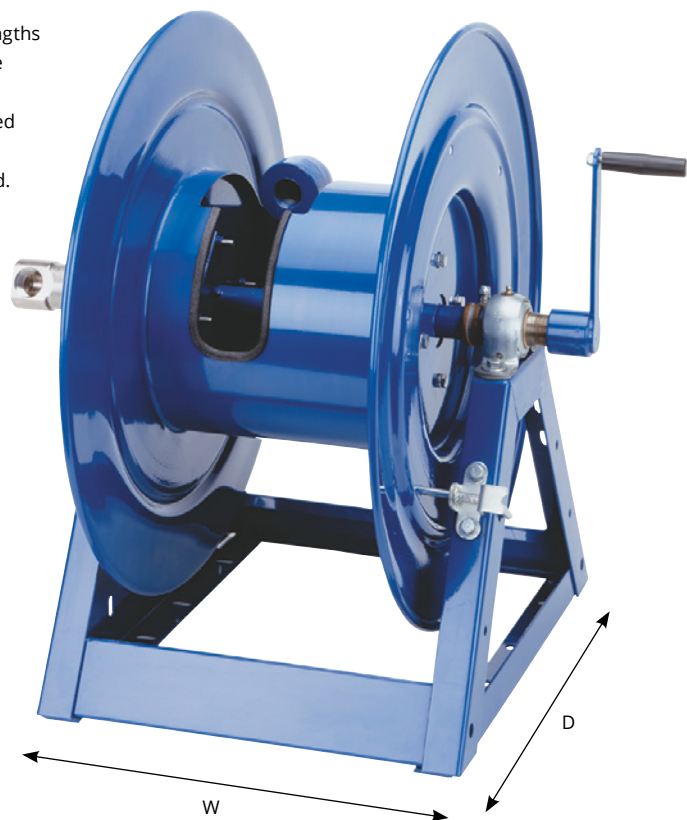

Rewind: Hand crank - Hand crank attaches to axle and is permanent. The handle maybe removed for flushing out purposes. NB. The handle would not under normal circumstances be removed when the reel is under pressure. Doing so will open the flow path and potentially harm the operator.
 Motor - Chain and sprocket drive. Auxiliary hand crank available as an option.

Inlet swivel assembly:

Series	Swivel assembly
1175-6 Series	1" female N.P.T. straight

Outlet riser:

Series	Riser
1175-6 Series	1" female N.P.T.

Hose roller guides: Please consult our sales team.

Product temperatures: These reels handle product temperatures from -28°C to +107°C

Product working pressure: See table below.



Hose capacity (m)					Model number	Reel dimension (mm)				Inlet & outlet size NPT (F)	Working pressure P.S.I.	Appx weight less hose	
I.D.	3/4"	1"	1 1/4"	1 1/2"		Depth A	Width B (crank)	Width B (elect.)	Width B (air)				Height C (crank)
O.D.	1 1/4"	1 7/16"	1 13/16"	2 1/16"									
	30	15			1175-6-50	610	629	518	470	667	1"	3000	31 kg
	45	30			1175-6-100	610	730	629	572	667	1"	3000	32 kg
	75	45			1175-6-150	610	832	730	673	667	1"	3000	34 kg
	90	60			1175-6-200	610	959	835	787	667	1"	3000	38 kg